




## SAFE LIFTING OF HEBEL AAC



- **Only qualified** doggers or riggers to rig loads
- **ALWAYS** use webbing slings to lift packs
- **ALWAYS** reeve/choke rig packs
- **NEVER** use chains
- **NEVER** sling packs using a basket hitch



## SAFE STACKING OF HEBEL

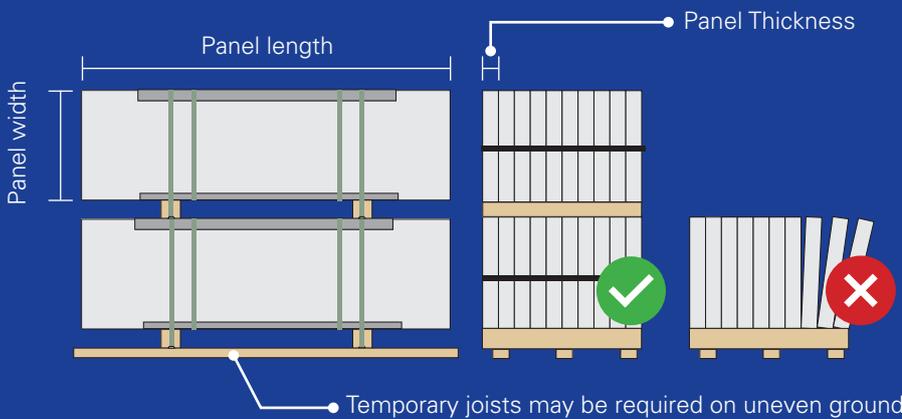

- **NEVER** stack strapped panels more than two packs high.
- **Brace all unstrapped panels** – timber bracing can be used with 100mm screws
- **NEVER** place panels on council strips/footpaths or public access area
- **ALWAYS** check safe loadbearing weight when storing packs on structures